



Vari+Plus® GT



Technical Data Sheet

Model Number	Nominal Size (In) (H x W x D)	Actual Size (In) (H x W x D)	Rated Air Flow Capacity (CFM)	Initial Resistance (In. W.G.) @ Rated Air Flow	Recommended Final Resistance (In. W.G.)	Gross Media Area (FT ²)
90 - 95% Efficiency (F - 8/MERV14)						
VPL-9504-GT	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2 (594mm x 594mm x 292mm)	2500 (4250 m ³ /hr)	.53" (131 Pa)	2.5" (622 Pa)	194
VPL-9503-GT	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2 (594mm x 289mm x 292mm)	1250 (2125 m ³ /hr)	.53" (131 Pa)	2.5" (622 Pa)	97
60 - 65% Efficiency (F - 6/MERV11)						
VPL-6504-GT	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2 (594mm x 594mm x 292mm)	2500 (4250 m ³ /hr)	.41" (102 Pa)	2.5" (622 Pa)	194
VPL-6503-GT	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2 (594mm x 289mm x 292mm)	1250 (2125 m ³ /hr)	.41" (102 Pa)	2.5" (622 Pa)	97

Performance data per ASHRAE 52.2 - 2007 Test Standard, based on 24x24x12 size at a velocity of 492 FPM.

Burst Strength-
30" W.G. (6220 Pa)

Underwriters Laboratories, Inc. Classification
U.L. Class 2 per U.L. Standard 900
Continuous Operating Temperature Limits
180°F (82°C)

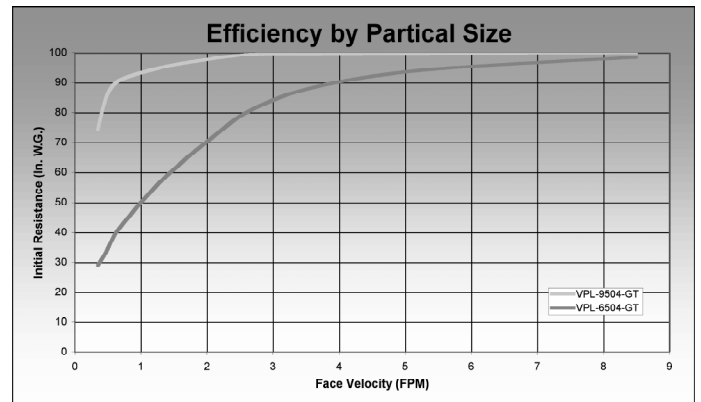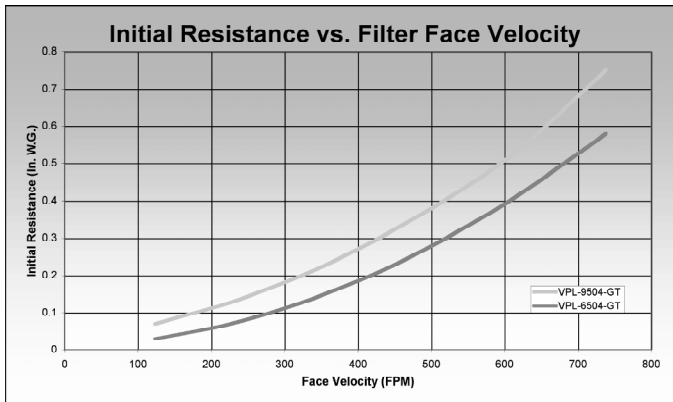

A-VPGTTECH-109



www.airguard.com



CLARCOR Air Filtration Products
100 River Ridge Circle • Jeffersonville, IN 47130
Customer Care Team: 1-866-247-4827 • Fax: 1-800-784-3458
Email: mailbag@airguard.com • www.airguard.com

Distributed by:

© 2009 CLARCOR Air Filtration Products.
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice.
Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.airguard.com